AC Wallbox Level 2 GS-X01 Series

Innovativeness

- Classic design, all match
- Home use with Tuya Smart Life App control
- Commercial use with OCPP 1.6J

Flexible Option

- Plug & Play
- Wall-mount or floor-stand installation

Secure and Safe

- Flame Resistance: UL 94-V0
- Anti-theft design



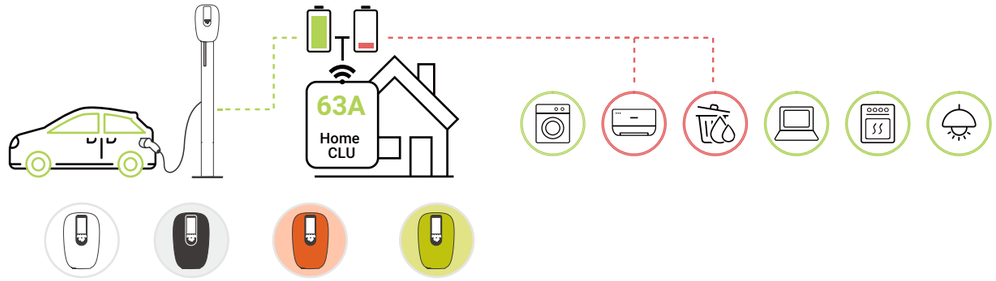

Datasheet	Model	GS-AC16-B02	GS-AC32-B02	GS-AC40-B02	GS-AC48-B02
Input	Power Supply	L1+L2+ Ground			
	Rated Voltage	240VAC Level 2			
	Rated Current	16A	32A	40A	48A
	Rated Output Power	3.5kW	7.5kW	10kW	11.5kW
User Interface	Charging Conneor	SAE J1772Type1			
	Cable Length	11.48 ft.(3.5m) 16.4ft.(5M)or 24.6ft.(7.5m)			
	Input CableConnector	NEMA 14-50 or NEMA 6-50 or Hardwired			
	Enclosure	PC 940A +ABS			
	LED Indicator	Power/Charge			
	RFID Reader	Mifare IS0/IEC 14443 A			
	Start Mode	Plug&Play /RFID card(Optionlal)			
	Emergency Stop	Yes			
Communication	Internet	/			
	Protocal	/			
Safety	Energy Meter	Optional			
	RCD	CCID 20			
	IP Protection	NEMA 4			
	Impact Protection	IK 10			
	Electrical Protection	Over current protection, Residual current protection, Ground protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over/Under temperature protection			
	Certification	FCC			
	Certification Standard	SAE J1772, UL 2231, and UL 2594			
	Warranty	1 Year			
Environment	Installation	Wall-mount/Pole-mount			
	Work Temperature	-25°C~+50°C			
	Work Humidity	5%~95%			
	Work Altitude	<2000M			
Package	Product Dimension	340*285*147mm (H*W*D)			
	Package Dimension	520*320*290mm(L*W*H)			
	Net Weight	6kg	7kg	9kg	10kg
	Gross Weight	7kg	8kg	10kg	11kg
	External Package	Carton			